




Saint-Gobain

Sani-Tech® Ball Check Valve

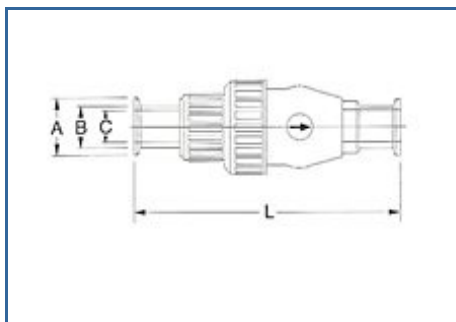

1

Item #	Size	L	A	C	Cv	Material	CAD
<u>TBC075</u>	MINI	5.950 in	0.992 in	0.560 in	8.30 gpm	Polypropylene	
<u>TBC100</u>	MAXI	6.630 in	1.500 in	0.856 in	15.40 gpm	Polypropylene	
<u>TBC150</u>	1 1/2	7.850 in	1.984 in	1.356 in	47.60 gpm	Polypropylene	
<u>TBC200</u>	2	8.000 in	2.516 in	1.856 in	61.60 gpm	Polypropylene	
<u>TBC250</u>	2 1/2	9.350 in	3.047 in	2.356 in	61.60 gpm	Polypropylene	
<u>TBC300</u>	3	10.750 in	3.579 in	2.856 in	84.00 gpm	Polypropylene	
<u>KBC075</u>	MINI	5.950 in	0.992 in	0.560 in	8.30 gpm	PVDF	
<u>KBC100</u>	MAXI	6.630 in	1.500 in	0.856 in	15.40 gpm	PVDF	
<u>KBC150</u>	1 1/2	7.850 in	1.984 in	1.356 in	47.60 gpm	PVDF	
<u>KBC200</u>	2	8.000 in	2.516 in	1.856 in	61.60 gpm	PVDF	
<u>KBC250</u>	2 1/2	9.350 in	3.047 in	2.356 in	61.60 gpm	PVDF	
<u>KBC300</u>	3	10.750 in	3.579 in	2.856 in	84.00 gpm	PVDF	

