
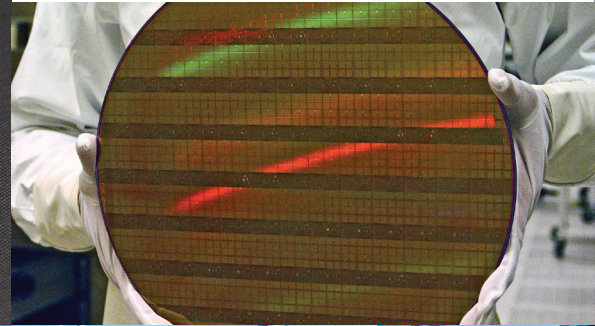


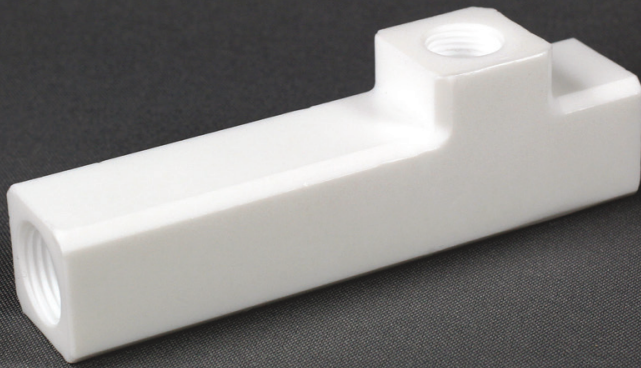

Furon® Aspirator

Simple & Compact Solution for Chemical Siphoning

Description

Furon Aspirators provide an economical option for siphoning liquid chemicals from a process vessel. Using a gas on our air-actuated aspirator will create a suction effect, allowing chemicals to be smoothly siphoned from the vessel. Using liquid such as DI water as driving media and applying water at a pressure of 10 PSI (0.7 bar) or more create the suction effect. The chemical is then diluted by water as it is siphoned through the aspirator. A specific dilution ratio may be targeted by a ratio siphon disk inserted at the siphon point, making Furon® Aspirators a reliable and economical means of diluting concentrated chemicals in wet process applications or disposing of spent chemicals.

Applications

- Siphoning process vessel by using a gas to operate
- Diluting chemical by using a compatible specific liquid to operate



Features and Benefits

- 100% High purity virgin PTFE construction
- Compact design
- Cost effective solution for siphoning chemicals
- Smart and simple solution to dilute your chemicals
- Easy installation

ASK AN ENGINEER

Furon Aspirator

Part Number	Actuation Type	Dilution Ratio	Inlet Port (in.) FNPT	Outlet Port (in.) FNPT	Siphon Port (in.) FNPT
A-1886-3:1	Liquid	3:1	3/8" (9.5 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)
A-1886-6:1	Liquid	6:1	3/8" (9.5 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)
A-1886-10:1	Liquid	10:1	3/8" (9.5 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)
A-A-1866	Air	N/A	3/8" (9.5 mm)	1/2" (12.7 mm)	3/8" (9.5 mm)
A-A-1886	Air	N/A	3/8" (9.5 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)

Ordering & Technical Specifications

Max. Operating Temperature	302°F (150°C)
Input Media Pressure	5 to 60 PSIG (0.3 to 4 bar)

Liquid Aspirators

Fluid Pressure Required to Achieve Suction	10 PSI (0.7 bar)
Max. Flow at Outlet Port	2.5 GPM (9.5 LPM)




Air Aspirators

Air Pressure	Suction Generated	Flow at Outlet
20 PSI (1.4 bar)	1.5" Hg (38.1 torr)	0.5 GPM (1.9 LPM)
30 PSI (2.1 bar)	2.5" Hg (63.5 torr)	0.75 GPM (2.8 LPM)
40 PSI (2.8 bar)	4.0" Hg (101.6 torr)	1.0 GPM (3.8 LPM)
50 PSI (3.4 bar)	5.0" Hg (127.0 torr)	1.0 GPM (3.8 LPM)
60 PSI (4.1 bar)	6.0" Hg (152.4 torr)	1.0 GPM (3.8 LPM)

Options

- FlareGrip II® end connections
- Nippon Pillar Super 300® end connections
- Custom configurations

Please consult factory for details.

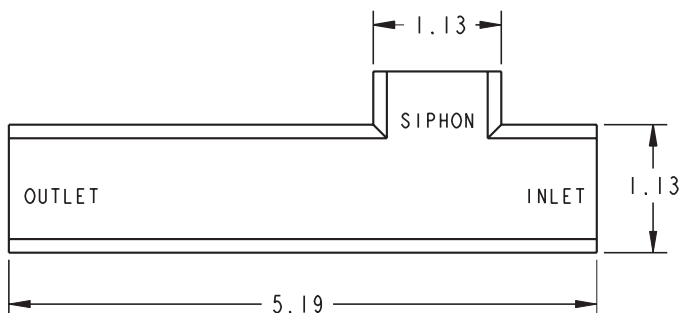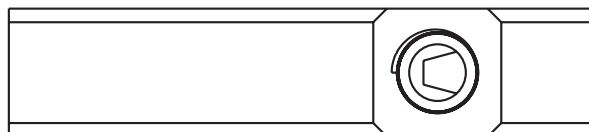

Saint-Gobain Performance Plastics
 7301 Orangewood Avenue
 Garden Grove, CA 92841
 1-800-833-5661
 Tel: (714) 630-5818
 Fax: (714) 688-2614

www.processsystems.saint-gobain.com

NOTE: The data and details given in this document are correct and up to date. This document is intended to provide information about the product and possible applications. This document is not the product specification and does not provide specific features, nor does it guarantee product performance in specific applications. Saint-Gobain cannot anticipate or control the conditions of the field and for this reason strongly recommends that practical tests are conducted to ensure that the product meets the requirements of a specific application.

Furon®, FlareGrip® and FuseBond™ are registered trademarks of Saint-Gobain Performance Plastics. Super 300® is a registered trademark of Nippon Pillar Packaging Co. LTD.

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain Performance Plastics products for all intended uses and that the components to be used comply with all applicable regulatory requirements. Saint-Gobain Performance Plastics assumes no responsibility for any product failures that occur due to misuse arising out of the design, fabrication or application of the products into which they are incorporated.

WARRANTY: For a period of 12 months from the date of first sale, Saint-Gobain Performance Plastics warrants this product to be free of defects in materials and workmanship. The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. THIS IS THE EXCLUSIVE WARRANTY AND IS EXPRESSLY IN LIEU OF ANY AND ALL OTHER OBLIGATIONS, GUARANTEES, WARRANTIES AND REPRESENTATIONS. SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.